

PRESSURE GAUGE AXIAL ALL STAINLESS STEEL WITH GLYCERINE D.100 BSP

Pressure gauge axial all stainless steel dry dial for liquid and gas network, not for viscous or crystallizing liquid and not attacking copper alloys, also in aggressive atmospheres, chemicals, petrochemicals, energy production, mining, on and offshore, environmental technology, construction of machines and technical installations.

Safety glass.

Protection indice IP65.

With vent security.



Size : Ø100

Connection : Male 1/2" BSP

Min Temperature : +0°C

Max Temperature : +60°C

Pressure Range : -1/+1 Bar to 0/+60 Bars

Specifications : All Stainless steel
Wet dial with glycerine
Safety glass
Class 1

Materials : AISI 304 box

PRESSURE GAUGE AXIAL ALL STAINLESS STEEL WITH GLYCERINE D.100 BSP

SPECIFICATIONS :

- All stainless steel
- Stainless steel mechanism
- With glycerine
- Safety glass
- 1 Class
- Protection IP65
- Back connection BSP threaded
- With vent security

USE :

- Not for viscous or crystallizing liquid
- Aggressive atmospheres, chemicals, petrochemicals, energy production, mining, on and offshore, environmental technology, construction of machines and technical installations.
- Min and max Temperature Ts : 0°C to +60°C

RANGE :

- All stainless steel pressure gauge with glycerine Ø 100 with 1/2" BSP back connection, range from -1/+1 to 0/60 bars **Ref. 1628**

ACCESSORIES :



- Steel support with screws **Ref. 9880012**



- 250 ml glycerine bottle **Ref. 9880401**

PRESSURE GAUGE AXIAL ALL STAINLESS STEEL WITH GLYCERINE D.100 BSP

GRADUATIONS :


Range (bar)	Graduation (bar)	Ref.
-1 / +1	0,05	1628001
0 / 1,6	0.02	1628002
0 / 2,5	0.05	1628003
0 / 4	0,1	1628004
0 / 6	0,1	1628005
0 / 10	0,2	1628006
0 / 16	0,2	1628007
0 / 25	0,5	1628008
0 / 40	1	1628009
0 / 60	1	1628010

MATERIALS :

DESIGNATION	MATERIALS
Box	AISI 304
Fitting	AISI 316
Mechanism	
Dial	Aluminium
Glass	Safety glass
Needle	Aluminium

PRESSURE GAUGE AXIAL ALL STAINLESS STEEL WITH GLYCERINE D.100 BSP

SIZE (in mm) :

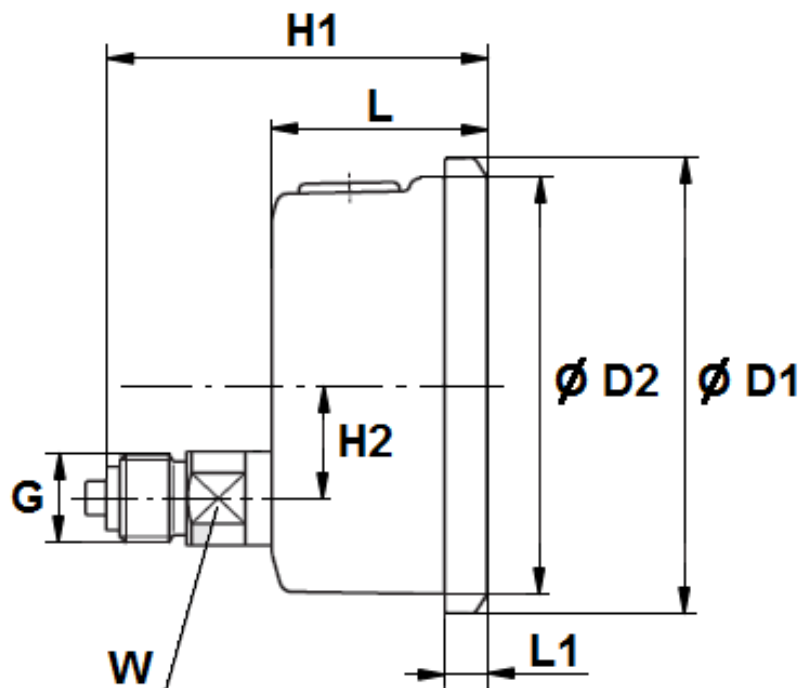

DN	100
Ø D1	112.5
Ø D2	101
H1	86
H2	30.6
G	1/2" BSP
L	47.50
L1	14.20
W	22
Weight (Kg)	0.76

STANDARDS :

- Manufacturer certified ISO 9001 : 2015
- Designing according to EN 837-1
- DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- Male BSP cylindrical threading according to ISO 228-1

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages.
The customer must check the right choice of the products with the real service conditions.