

3 PIECES BALL VALVE WITH ISO MOUNTING PAD PN 63 INITIAL RANGE BW

3 pieces stainless steel ball valve with full bore for Chemical industries, petrochemical industries, hydraulic installation, heating, water distribution, compressed air.

PTFE packing, FKM O ring gasket on stem and PTFE filled with 15% glass seat.

Compatible with explosive atmosphere, ATEX Zone 1&21 and Zone 2&22 thanks to the antistatic device.

Thanks to the ISO 5211 plate, an actuator can be installed on the valve.



Certificate
3.1



LRQA
PED/2014/68/UE



Size : DN15 to DN50

Connection : BW

Min Temperature : -20°C

Max Temperature : +180°C

Max Pressure : 63 Bars up to DN20

Specifications : ISO 5211 mounting pad

PTFE filled with 15% glass seat

Anti blow-out stem, full bore

ATEX

Materials : Stainless steel ASTM A351 CF8M

3 PIECES BALL VALVE WITH ISO MOUNTING PAD PN 63 INITIAL RANGE BW


SPECIFICATIONS :

- Full bore
- Anti blow-out stem
- PTFE packing
- ISO 5211 direct mounting pad
- Double antistatic device (between stem-body and stem-ball)
- Atex
- Locking device

USE :

- Chemical industries, petrochemical industries, hydraulic installation, heating, water distribution, compressed air
- Min and max Temperature Ts : -20°C to + 180°C
- Max Pressure Ps : 63 bars up to DN20, 40 bars from DN25 to DN50 (see graph under)

PRESSURE / TEMPERATURE GRAPH (STEAM AND COMPRESSED AIR EXCLUDED) :

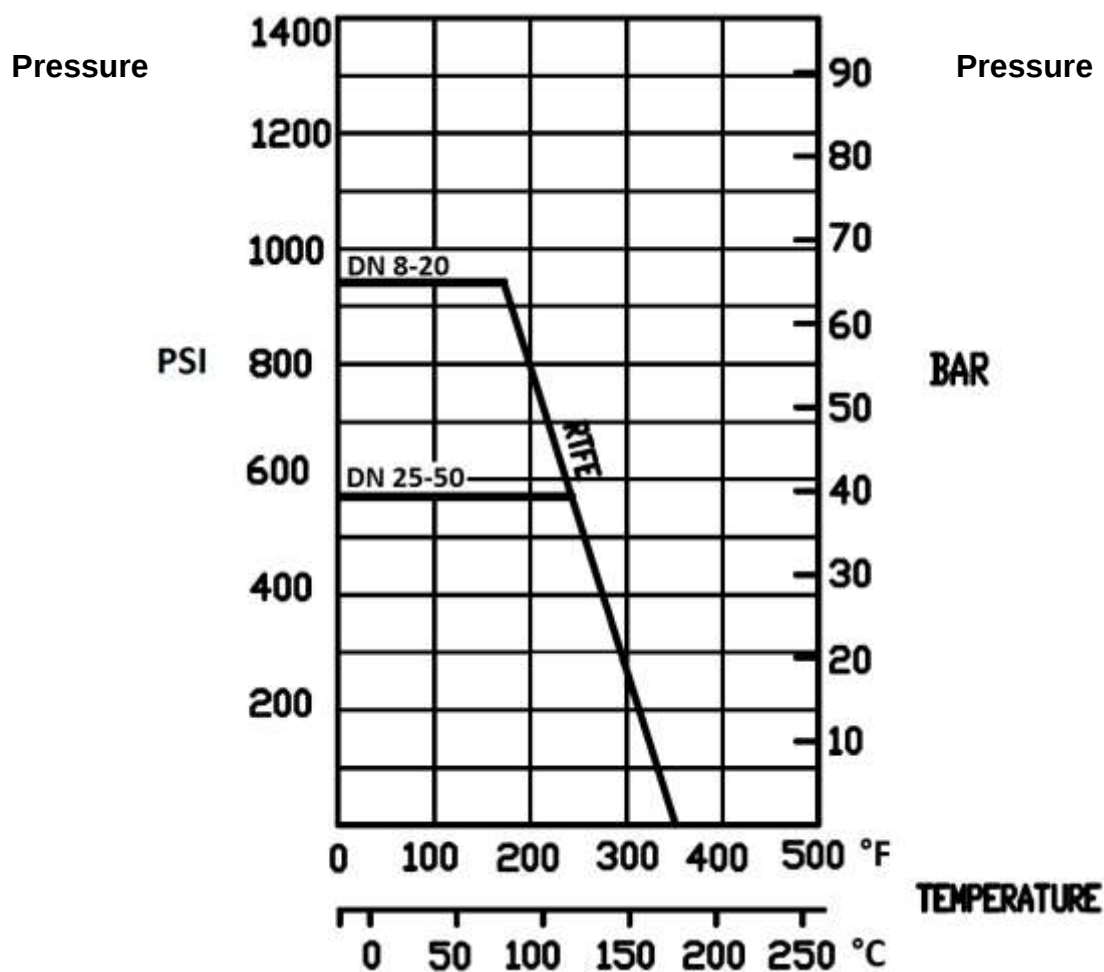

3 PIECES BALL VALVE WITH ISO MOUNTING PAD PN 63 INITIAL RANGE BW

TORQUE VALUES (in Nm without safety coefficient) :

DN	15	20	25	32	40	50
Torque (Nm)	2.5	3.5	6	7	12	16

BOLT TIGHTENING TABLE (in Nm):

DN	15	20	25	32	40	50
Torque (Nm)	8	8	10	13	20	20

FLOW COEFFICIENT Kvs (m3 / h) :


DN	15	20	25	32	40	50
Kvs (m3/h)	20.7	30.2	40.6	70	90.8	208.4

RANGE :

- 3 pieces ball valve with ISO mounting pad Butt Welding ends **Ref. 741 from DN15 to DN50.**

3 PIECES BALL VALVE WITH ISO MOUNTING PAD PN 63 INITIAL RANGE BW

MATERIALS :

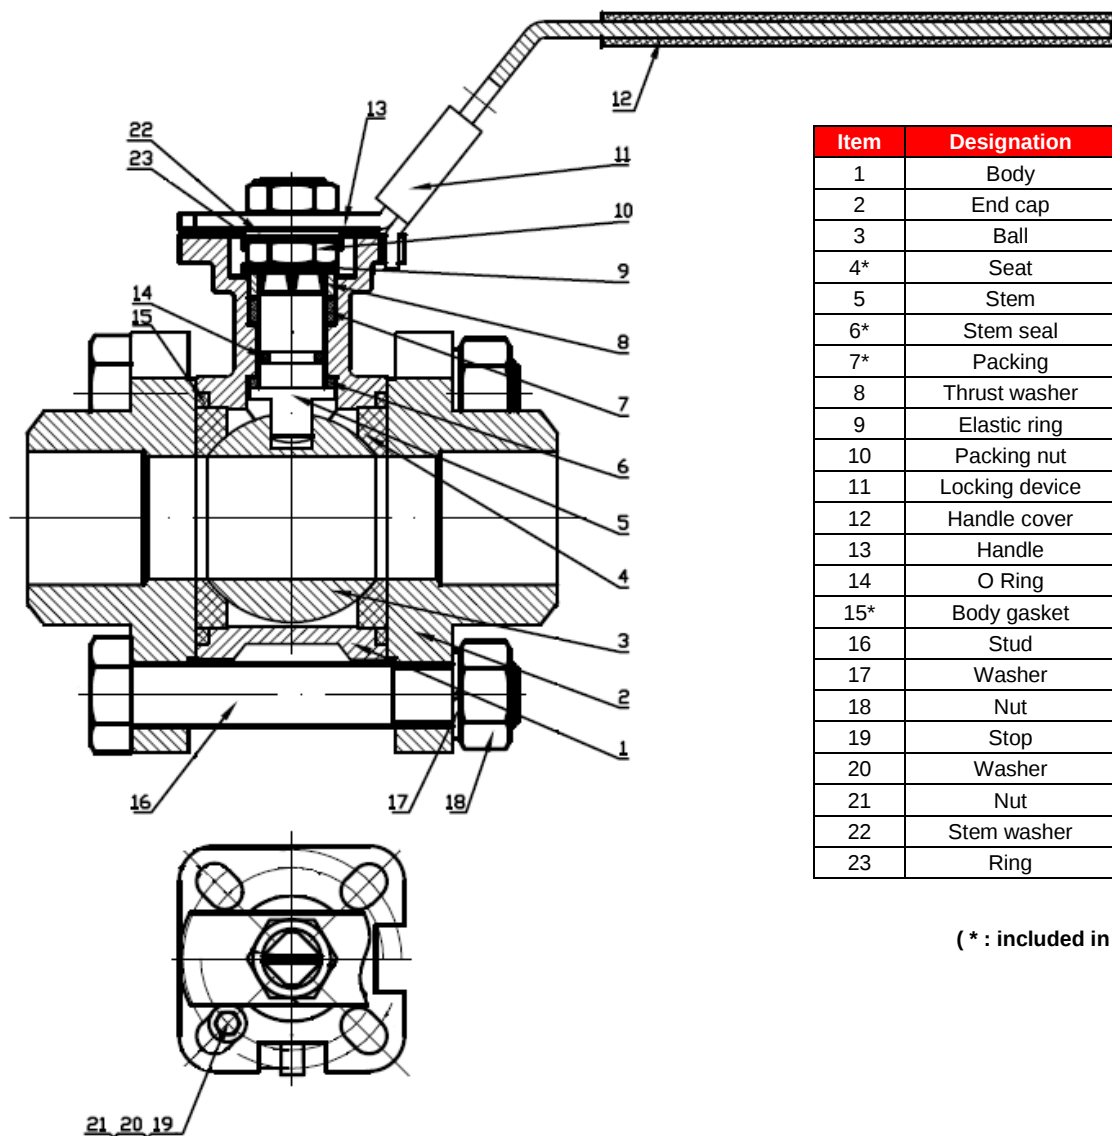

Item	Designation	Materials
1	Body	ASTM A351 CF8M
2	End cap	
3	Ball	AISI 316
4*	Seat	PTFE + 15% glass
5	Stem	AISI 316
6*	Stem seal	PTFE
7*	Packing	
8	Thrust washer	AISI 304
9	Elastic ring	
10	Packing nut	
11	Locking device	
12	Handle cover	Plastic
13	Handle	AISI 304
14	O Ring	FKM
15*	Body gasket	PTFE
16	Stud	AISI 304
17	Washer	
18	Nut	
19	Stop	
20	Washer	
21	Nut	
22	Stem washer	
23	Ring	

(* : included in gaskets kit)


Repairability :



*Gaskets Kit (Items 4, 6, 7 and 15)	
DN	Ref.
DN15	9804502
DN20	9804503
DN25	9804504
DN32	9804505
DN40	9804506
DN50	9804507

3 PIECES BALL VALVE WITH ISO MOUNTING PAD PN 63 INITIAL RANGE BW


SIZE (en mm):

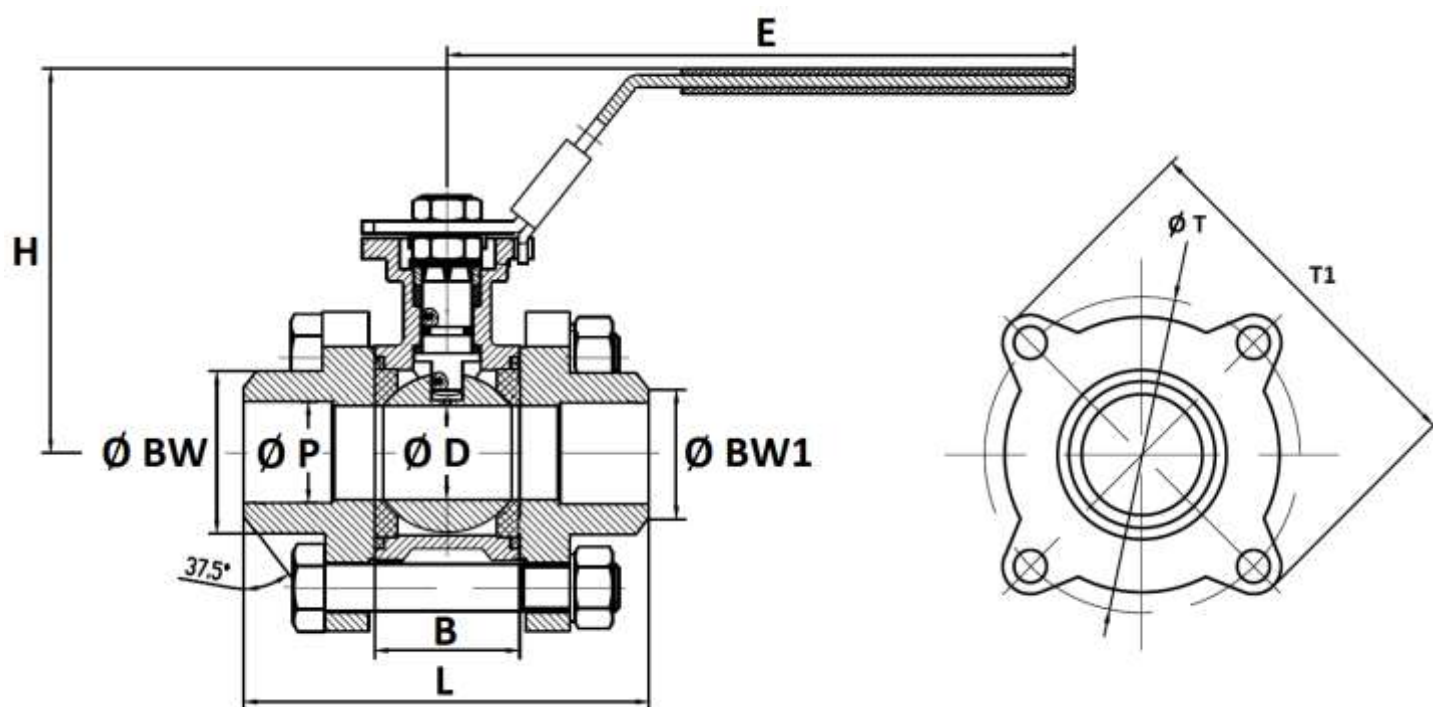

DN	15	20	25	32	40	50
Ø D	15	20	25	32	38	50
L	66	70.6	82	97	109	124.6
B	26	28.6	34	44	51	62.8
E	141	141	162	162	188	188
H	75	81	93	98	109	124
Ø T	47.5	51.5	58	70	81.5	101
T1	62	66	74.5	86.5	100.5	121.5
Ø BW	22	27.3	34	42.7	48.7	61
Ø BW1	17	22.5	28.6	36	43	54
Ø P	15	20	25	32	39.8	50
Weight (in Kg)	0.62	0.71	1.09	1.48	2.39	3.72
Ref.	741015	741020	741025	741032	741040	741050

3 PIECES BALL VALVE WITH ISO MOUNTING PAD PN 63 INITIAL RANGE BW

ISO MOUNTING PAD AND STEM SIZE (in mm) :

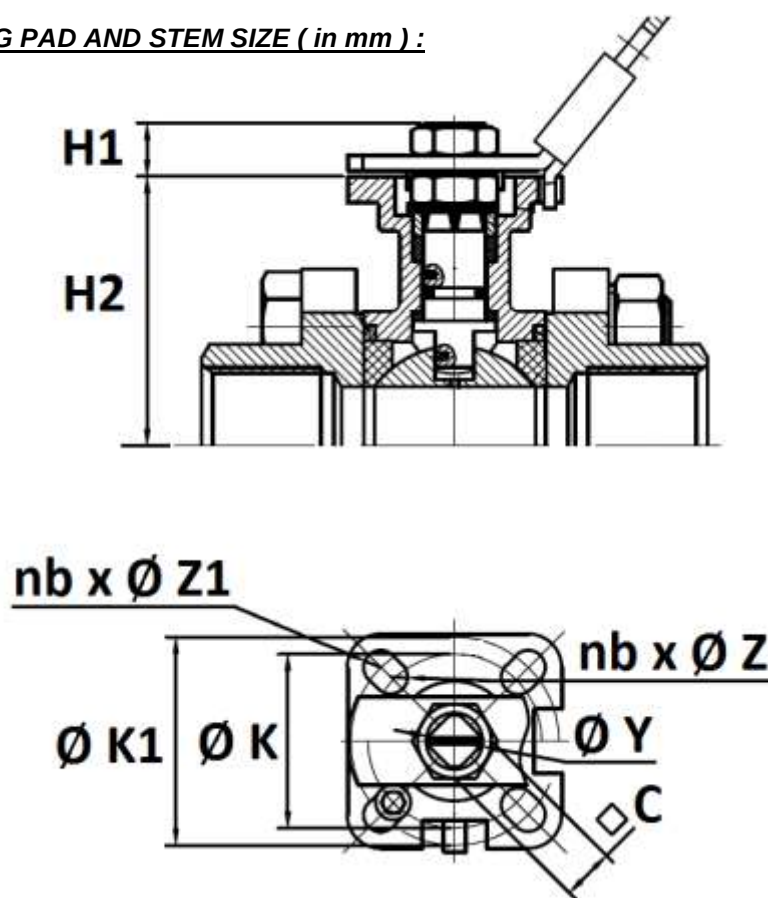

DN	15	20	25	32	40	50
C	9		11		14	
Ø Y	M12x1.5		M14x1.5		M18x1.5	
H1	9		11		15	
H2	42	48	55	60	70	85
Ø K	36		42		50	
ISO	F03		F04		F05	
nb x Ø Z	4 x 6				4 x 7	
Ø K1	42		50		70	
ISO 1	F04		F05		F07	
N x Ø Z1	4 x 6		4 x 7		4 x 9	

3 PIECES BALL VALVE WITH ISO MOUNTING PAD PN 63 INITIAL RANGE BW

STANDARDS :

- Manufacturer certified ISO 9001 : 2015
- DIRECTIVE 2014/68/EU : For liquids and gas of Group 1
 - DN15-25 : Article 4, §3 (SEP), no CE marking
 - DN32-50 : Risk Category II, CE0038 or CE0343 marking
- Construction according to EN 12516-2
- Certificate 3.1 on request
- Pressure tests according to API 598
- ISO 5211 mounting pad
- ATEX Group II Category 2G IIA TX (optional marking) according to Directive 2014/34/UE

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages.
The customer must check the right choice of the products with the real service conditions.